

Alçıpan Profilleri / Drywall Profiles

Duvar C Profili



C - Wall Profile

C – Duvar profilleri, profilin her iki tarafına alçıpan vidalanarak taşıyıcı olmayan bölme duvar konstrüksiyonu olarak kullanılmaktadır.

Bu profil şekli 3 farklı taban genişliğine (49mm – 74mm – 99mm), 3 farklı kenar uzunluğuna (30mm – 35mm – 40mm) ve 3 farklı malzeme kalınlığına (0,45mm – 0,5mm – 0,6mm) sahip olabilir.

Profiller 80-100 gr/m² aralığında galvaniz kaplıdır.

C – Wall profiles are using for as a non-carrying partition wall construction by screwing drywall on the both side of profile. This profile shape can has 3 different base width (49mm – 74mm – 99mm), has 3 different side length (30mm – 35mm – 40mm) and has 3 different material thickness (0,45mm – 0,5mm – 0,6 mm). Profiles are covered by galvanized with the range between 80-100 gr/m².

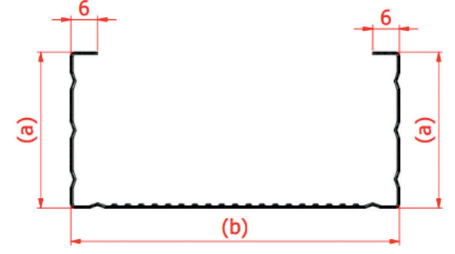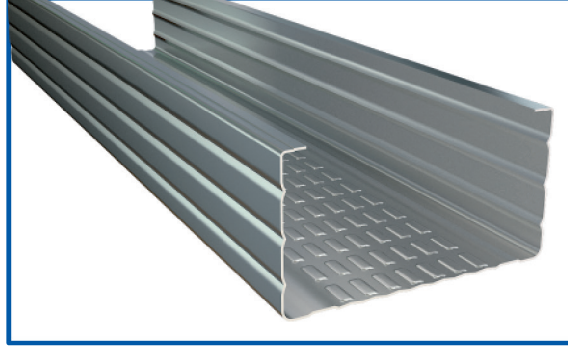

Profil Tanımı Profile Definition	Profil Ölçüsü Profile Size	Profil Uzunluğu Profile Length	Paket Adedi Pack qty
Duvar C Eko / Wall C Eco (0,35 mm),(0,38 mm)	35x(50,75,100)x35	3	12
Duvar C Eko / Wall C Eco (0,35 mm),(0,38 mm)	40x(50,75,100)x40	3	12
Duvar C / Wall C (0,40 mm),(0,45 mm)	35x(50,75,100)x35	3	12
Duvar C / Wall C (0,40 mm),(0,45 mm)	40x(50,75,100)x40	3	12
Duvar C / Wall C (0,50 mm),(0,55 mm)	35x(50,75,100)x35	3	12
Duvar C / Wall C (0,50 mm),(0,55 mm)	40x(50,75,100)x40	3	12
Duvar C / Wall C (0,60 mm)	35x(50,75,100)x35	3	12



Duvar U Profili

U - Wall Profile

U – Duvar profilleri, profilin her iki tarafına alçıpan vidalanarak taşıyıcı olmayan bölme duvar yapımında kullanılır. Bu profil şekli 3 farklı taban genişliğine (50mm – 75mm – 100mm) ve 3 farklı malzeme kalınlığına (0,45mm – 0,5mm – 0,6mm) sahip olabilir. Profiller 80-100 gr/m² aralığında galvaniz kaplıdır.

U – Wall profiles are using for as a non-carrying partition wall construction by screwing drywall on the both side of profile.

This profile shape can has 3 different base width (50mm – 75mm – 100mm) and has 3 different material thickness (0,45mm – 0,5mm – 0,6 mm). Profiles are covered by galvanized with the range between 80-100 gr/m².

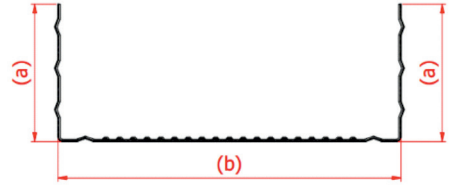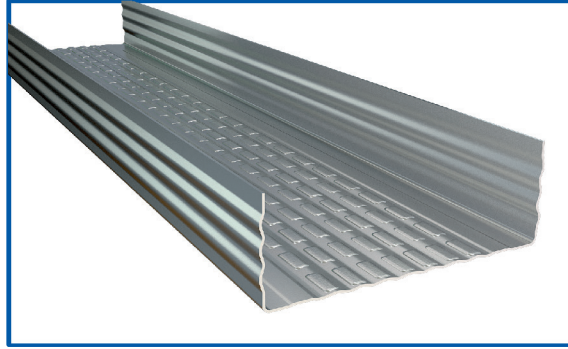

Profil Tanımı Profile Definition	Profil Ölçüsü Profile Size	Profil Uzunluğu Profile Length	Paket Adedi Pack qty
Duvar U Eko / Wall U Eco (0,35 mm),(0,38 mm)	30x(50,75,100)x30	3	12
Duvar U Eko / Wall U Eco (0,35 mm),(0,38 mm)	34x(50,75,100)x34	3	12
Duvar U Eko / Wall U Eco (0,35 mm),(0,38 mm)	38x(50,75,100)x38	3	12
Duvar U / Wall U (0,40 mm),(0,45 mm)	30x(50,75,100)x30	3	12
Duvar U / Wall U (0,40 mm),(0,45 mm)	34x(50,75,100)x34	3	12
Duvar U / Wall U (0,40 mm),(0,45 mm)	38x(50,75,100)x38	3	12
Duvar U / Wall U (0,50 mm),(0,55 mm)	30x(50,75,100)x30	3	12
Duvar U / Wall U (0,50 mm),(0,55 mm)	34x(50,75,100)x34	3	12
Duvar U / Wall U (0,50 mm),(0,55 mm)	38x(50,75,100)x38	3	12
Duvar U / Wall U (0,60 mm)	30x(50,75,100)x30	3	12
Duvar U / Wall U (0,60 mm)	34x(50,75,100)x34	3	12
Duvar U / Wall U (0,60 mm)	38x(50,75,100)x38	3	12